
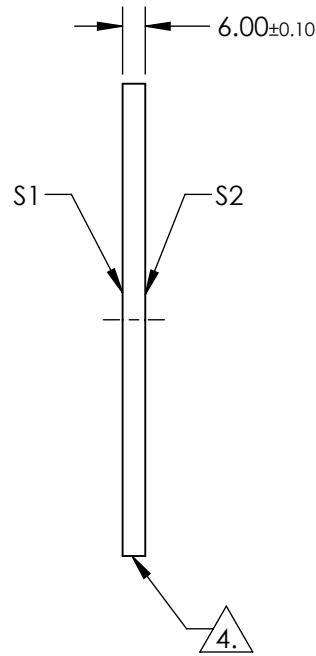


NOTES:

1. SUBSTRATE: Fused Silica (Corning 7980)
2. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: R(AVG) $\leq 0.4\%$ FROM 425 - 675nm
3. SURFACE S1 TO BE PARALLEL WITH SURFACE S2 TO WITHIN < 10 ARCSEC

 FINE GRIND SURFACE

5. ROHS COMPLIANT

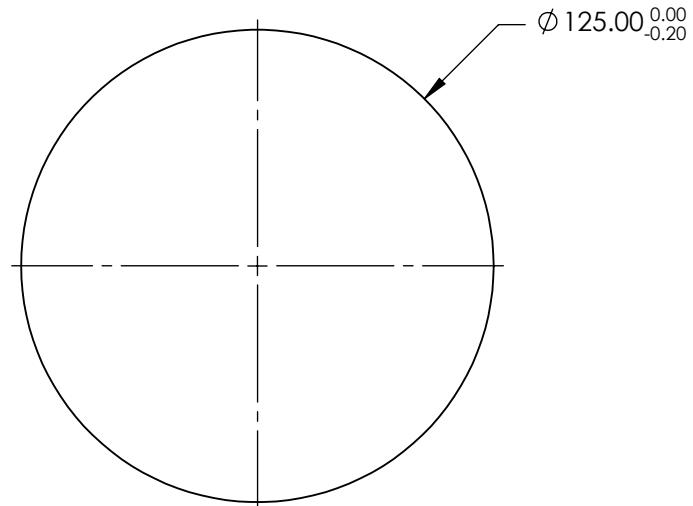

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	40-20	40-20
CLEAR APERTURE	Ø 112.50	Ø 112.50
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION	TITLE	125mm Dia., 6mm Thick, VIS 0° Coated $\lambda/10$ Fused Silica Window	
ALL DIMS IN	mm	DWG NO	SHEET 1 OF 1
		22068	

 **Edmund Optics®**