
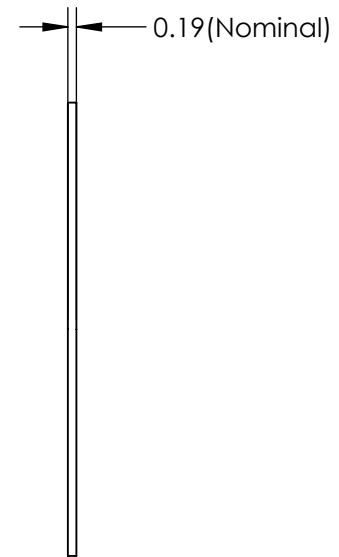
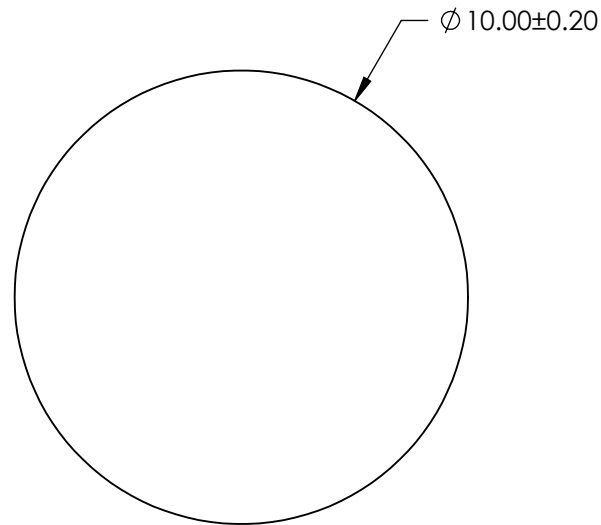


NOTES:


1. SUBSTRATE: CTA (Cellulose Triacetate)
2. OPERATING TEMPERATURE: -20 TO +70 °C
3. WAVELENGTH RANGE (nm): 320 - 750
4. COUNTING: UNCOATED
5. TRANSMISSION (%)
 - SINGLE: 39 (325 - 400nm)
 - CROSSED: 0.04 (325 - 400nm)
6. ROHS COMPLIANT



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

THIRD ANGLE PROJECTION 		TITLE	10mm Dia. UV Polarizing Film	
ALL DIMS IN	mm	DWG NO	72678	SHEET 1 OF 5